


THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF DATA GENERAL CORPORATION AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION.

REVISIONS				
REV.	DESCRIPTION	DRFTG.	APP. BY	DATE

TELETYPE RELAY BOARD

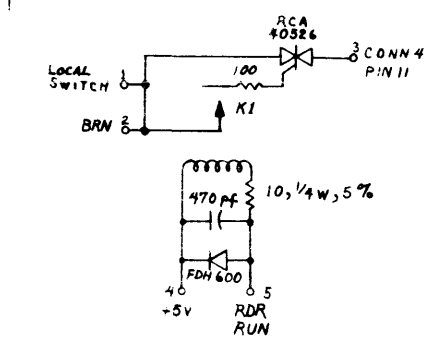

QTY	DESCRIPTION	PART NO.
1	PC BOARD	107-000006-02
1	RCA 40526 TRIAC	101-000038-00
1	10 1/4 W, 5% RESISTOR	102-000015-00
1	100 1/4 W, 5% RESISTOR	102-000039-00
1	470 pf CAPACITOR	103-000004-00
1	DIODE FDH600	101-000002-00
1	K1 RBM RELAY 99-401242-3	110-000001-00

4010 CONNECTOR WIRING FOR TELETYPE OPTION

CANNON DEC-9S		BACK PANEL NOVA	
PIN	SIGNAL	PIN	
1	+ 5 VOLTS	ANY PIN 3, 4, 97 OR 98	
2	RD RUN	3 A 89	
3	TT IN	3 B 69	
4	- 5 VOLTS	3 A 6	
5	SPARE		
6	TTOUT	3 A 85	
7	+ V	3 A 83	
8	DATA IN STOP	3 A 87	
9	GND	ANY PIN 1, 2, 99 OR 100	

CANNON DEC 9P		CABLE		IN TELETYPE	
PIN	COLOR	SIGNAL	PCB	TERM STRIP PIN	
1	RED	+ 5 VOLTS	+ 5 VOLTS		TWISTED
2	BLK	RD RUN	RD RUN		PAIR
3	GRN	TT IN		3	TWISTED
4	BLUE	- 5 VOLTS		4	PAIR
5		SPARE			
6	WHT	TTOUT		6	TWISTED
7	ORANGE	+ V		7	PAIR
8					JUMPER IN
9					DEC 9P 8, 9

NOTE:  
CABLE IS 13 FEET OVERALL, 6 CONDUCTOR, 3 TWISTED PAIR

QTY	DESCRIPTION	PART NO.

UNLESS OTHERWISE SPECIFIED—  
DIMENSIONS ARE IN INCHES  
TOLERANCES ON  
FRACTIONS DECIMALS ANGLES  
= .001 = .001 = =  
PARTS TO BE FREE FROM BURRS  
BREAK ALL EDGES 1/16

UNLESS OTHERWISE SPECIFIED—  
ALL MACH SURFACES

MATERIAL

FINISH

DRAWN *W. Beckwith* 3-70  
CHECKED  
ENGINEER  
APPROVED  
FIRST USED ON

TITLE  
TELETYPE RELAY BOARD  
AND  
CONNECTOR WIRING LIST

SIZE CODE D 001  
DRAWING NUMBER 000013  
REV 01

SHEET 1 OF 1